PROFICIENT®
AUDIO

Product Catalog

January 2022

Meet the Family of Proficient® Audio Solutions

Signature Series

Home Theater

Whole House

Cabinet Loudspeakers

Subwoofers

Outdoor Sound

Electronics

Accesories

Table of Contents

Category Page

Protege Cabinet Speakers 4

Signature LCR Speaker 8

Signature Whole-House Speakers 9

Signature & Protege Whole-House Ceiling Speakers 10

Signature & Protege LCR Speakers 12

Signature & Protege Inwall Speakers 14

Protege Twin-Tweeter Ceiling Speakers 15

Powered Subwoofers 18

Protege Passive Architectural Subwoofers 21

Indoor/Outdoor Speakers 24

Outdoor/Indoor Twin-Tweeter Speakers 25

Signature Landscape Speakers 26

Protege Landscape Speakers 28

Rock and Planter Speakers 29

Speaker Selectors 31

Volume Controls 31

Pre-Construction Brackets 32

Ceiling Tile Brackets 33

Back Boxes 33

Speaker Cover Plates 34

Replacement Speaker Grilles 35

PROFICIENT
Protege

Cabinet Speakers

Protege LFS6 Dual 6″ Floor Standing Speaker

ITEM	U/M
LFS6	Each

Our top-of-the-line floor standing speakers sound amazing with or without a subwoofer. Dual 6″ graphite woofers in a carefully tuned floor standing enclosure deliver pounding bass powerful enough for rock, R&B and the most intense action movies. The smooth midrange of the ultra-light, ultra-rigid graphite cones combines with the sweet sound of a 1″ silk dome tweeter to keep everything from female vocals to flutes sounding airy and natural, like they're right there in the room with you. The LFS6 has a matte black finish and removable black grille with neo-magnets. Add the LDA5 speaker to turn the LFS6 into an immersive sound system compatible with height & effect.

- Power Handling: 125 Watts
- Frequency Response: 60Hz - 20kHz
- Impedance: 6Ω
- Sensitivity: 89dB 2.83V/1m
- Cabinet Design: Rounded Corner MDF Cabinets
- Dimensions (H x W x D): 39 11/16″ x 8 7/16″ x 9½″

Protege LB62 6″ Bookshelf Speakers

ITEM	U/M
LB62	Pair

Our top bookshelf speakers are perfect for smaller systems and surround sound. Features 6″ graphite woofers, 1″ silk dome tweeters and 100 watt power handling. The LB62 has a matte black finish and removable black grilles with neo-magnets, integrated flush mounted single-slot wall mounts and threaded brass inserts for OmniMount 15.0 Wall or 15.0 Ceiling brackets. Add the LDA5 speaker to turn the LB62 into an immersive sound system compatible with height & effect.

- Power Handling: 100 Watts
- Frequency Response: 74Hz - 20kHz
- Impedance: 6Ω
- Sensitivity: 87dB 2.83V/1m
- Cabinet Design: Rounded Corner MDF Cabinets
- Dimensions (H x W x D): 13⅛″ x 8 7/16″ x 9½″

Protege LB52 5″ Bookshelf Speakers

ITEM	U/M
LB52	Pair

A small bookshelf speaker that delivers spectacular sound in tight spaces and works great for home theater systems, too. Features 5″ graphite woofers, 1″ silk dome tweeters and 80 watt power handling. The LB52 has a matte black finish and emovable black grilles with neo-magnets, integrated flush mounted single-slot wall mounts and threaded brass inserts for OmniMount 15.0 Wall or 15.0 Ceiling brackets and OmniMount 10.0 Wall / Ceiling brackets.

- Power Handling: 80 Watts
- Frequency Response: 78Hz - 20kHz
- Impedance: 6Ω
- Sensitivity: 86dB 2.83V/1m
- Cabinet Design: Rounded Corner MDF Cabinets
- Dimensions (H x W x D): 11¾″ x 7 3/16″ x 8½″

PROFICIENT
Protege™

Cabinet Speakers

Protege LSB3 3-Channel Passive Soundbar

ITEM	U/M
LSB3	Each

Use this three-channel passive soundbar with any A/V receiver to build a compact yet powerful home theater system. Features six 3″ graphite woofers, three 1″ silk dome tweeters and 60 watt (per channel) power handling. The LSB3 has a matte black finish and removable black grille with neo-magnets. Includes a Proficient-designed horizontally adjustable wall-mounting bracket.

- Power Handling: 60 Watts (per channel)
- Frequency Response: 140Hz - 20kHz
- Impedance: 6Ω
- Sensitivity: 88dB 2.83V/1m
- Cabinet Design: Rounded Corner MDF Cabinets
- Dimensions (H x W x D): 5 3/16″ x 39 13/16″ x 2¾″

Protege LCRE5 Dual 5″ LCR & Effect Speaker

ITEM	U/M
LCRE5	Each

Our best LCR & effect speaker delivers high power from its two 5″ graphite woofers, a 1″ silk dome tweeter and 100 watt power handling. Features a matte black finish, removable black grille with neo-magnets and two integrated flush mounted cross-slotted wall mounts. Easily mounts horizontally or vertically.

- Power Handling: 100 Watts
- Frequency Response: 74Hz - 20kHz
- Impedance: 6Ω
- Sensitivity: 87dB 2.83V/1m
- Cabinet Design: Rounded Corner MDF Cabinets
- Dimensions (H x W x D): 7 3/16″ x 20″ x 4″

Protege LCRE4 Dual 4″ LCR & Effect Speaker

ITEM	U/M
LCRE4	Each

A compact LCR & effect speaker that's perfect for small media rooms, dens and compact stereo systems. Features two 4″ graphite woofers, a 1″ silk dome tweeter and 90 watt power handling. The LCRE4 has a matte black finish, removable black grille with neo-magnets and two integrated flush mounted cross-slotted wall mounts. Easily mounts horizontally or vertically.

- Power Handling: 90 Watts
- Frequency Response: 80Hz - 20kHz
- Impedance: 6Ω
- Sensitivity: 86dB 2.83V/1m
- Cabinet Design: Rounded Corner MDF Cabinets
- Dimensions (H x W x D): 6 3/16″ x 20″ x 4″

Protege LDA5 5″ Dolby Atmos® Speakers

ITEM	U/M
LDA5	Pair

Our Dolby Atmos enabled loudspeakers reflect sound off the ceiling for immersive Dolby Atmos and DTS:X surround sound. Features a slanted speaker baffle, 5″ graphite woofers, 1″ silk dome tweeters and 60 watt power handling. The LDA5 features a matte black finish, removable black grilles with neo-magnets and integrated flush mounted single-slot wall mounts. Designed to sit on top of the LFS6 or LB62, or mount on the wall below the ceiling.

- Power Handling: 60 Watts
- Frequency Response: 120Hz - 20kHz
- Impedance: 6Ω
- Sensitivity: 84dB 2.83V/1m
- Cabinet Design: Rounded Corner MDF Cabinets
- Dimensions (H x W x D): 5⅞″ x 6⅞″ x 10¼″

Signature Design,

Exceptional Sound

A flagship product line built for the few, not the many. Its creation is free of restrictions that favor bottom line compromise ahead of top line performance. These considerations led us to produce Proficient Signature Speaker Series.

It's our best of everything, an all star lineup featuring nine flagship speakers from home theater to whole house audio. Each speaker represents an unmatched combination of power, precision and performance. Proficient Signature Speakers are all about qualities rarely seen working and playing well together in many other speaker brands. Like value and luxury. Innovation and tradition. Exuberance and poise.

The Proficient Signature Speakers series is where sound performance you never thought possible becomes something you just can't live without.

PROFICIENT
Signature™

PROFICIENT
Signature

LCR Speakers

Signature C1075s 10″ Ceiling LCR Speaker

ITEM C1075s **U/M** Each

One LCR ceiling speaker with woofer and midrange/tweeter bridge fixed at a 15˚ angle. 10″ Kevlar® woofer, 3″ pivoting Kevlar® midrange, 1″ pivoting aluminum dome tweeter, ±3dB midrange & treble contour switches and 200 watt power handling. Required for installation, the included PCB-C1000 bracket is designed for new construction as well as retrofit applications.

- Replaces C1031 Ceiling LCR Speaker
- Power Handling: 200 Watts
- Frequency Response: 25Hz - 22kHz
- Impedance: 4Ω
- Sensitivity: 94dB 1W/1m
- Includes Thin-Bezel Grille held by Neo Magnets
- Diameter x Depth: 13⅜″ x 7⅞″
- Ceiling Cut Out: 11⅞″

Signature C875s 8″ Ceiling LCR Speaker

ITEM C875s **U/M** Each

One LCR ceiling speaker with woofer and tweeter bridge fixed at a 15˚ angle. 8″ Kevlar® woofer and 1″ pivoting aluminum dome tweeter, ±3dB bass & treble contour switches and 175 watt power handling.

- Replaces C871 Ceiling LCR Speaker
- Power Handling: 175 Watts
- Frequency Response: 28Hz - 22kHz
- Impedance: 8Ω
- Sensitivity: 92dB 1W/1m
- Includes Thin-Bezel Grille held by Neo Magnets
- Diameter x Depth: 11⅛″ x 5¾″
- Ceiling Cut Out: 9¾″

Signature C675s 6½″ Ceiling LCR Speaker

ITEM C675s **U/M** Each

One LCR ceiling speaker with woofer and tweeter bridge fixed at a 15˚ angle. 6½″ Kevlar® woofer and 1″ pivoting aluminum dome tweeter and 125 watt power handling.

- New Ceiling LCR Speaker
- Power Handling: 125 Watts
- Frequency Response: 32Hz - 22kHz
- Impedance: 8Ω
- Sensitivity: 90dB 1W/1m
- Includes Thin-Bezel Grille held by Neo Magnets
- Diameter x Depth: 9¼″ x 3 15/16″
- Ceiling Cut Out: 8¼″

Signature IW675s 6½″ Inwall LCR Speaker

ITEM IW675s **U/M** Each

One inwall LCR speaker with two 6½″ Kevlar® woofers, 1″ pivoting aluminum dome tweeter, ±3dB bass & treble contour switches and 150 watt power handling. Fits horizontally between 16″ on-center wall studs.

- Replaces IW655 Inwall LCR Speaker
- Power Handling: 150 Watts
- Frequency Response: 40Hz - 22kHz
- Impedance: 8Ω
- Sensitivity: 90dB 1W/1m
- Includes Thin-Bezel Grille held by Neo Magnets
- Dimensions (H x W x D): 9″ x 16⅛″ x 3 3/16″
- Wall Cut Out (H x W): 7½″ x 14½″

Signature IW575s 5¼″ Inwall LCR Speaker

ITEM IW575s **U/M** Each

One inwall LCR speaker with two 5¼″ Kevlar® woofers, 1″ pivoting aluminum dome tweeter, ±3dB bass & treble contour switches and 125 watt power handling.

- Replaces IW555 Inwall LCR Speaker
- Power Handling: 125 Watts
- Frequency Response: 50Hz - 22kHz
- Impedance: 8Ω
- Sensitivity: 88dB 1W/1m
- Includes Thin-Bezel Grille held by Neo Magnets
- Dimensions (H x W x D): 8″ x 15 15/16″ x 3⅜″
- Wall Cut Out (H x W): 6 3/16″ x 14½″

PROFICIENT
Signature

Whole-House Speakers

Signature C895s 8″ Ceiling Speakers

ITEM	U/M
C895s	Pair

One pair of ceiling speakers with 8″ Kevlar® woofers, cast magnesium woofer baskets, 1″ pivoting aluminum dome tweeters, ±3dB bass & treble contour switches and 175 watt power handling.

- Replaces C851 Ceiling Speakers
- Power Handling: 175 Watts
- Frequency Response: 28Hz - 22kHz
- Impedance: 8Ω
- Sensitivity: 92dB 1W/1m
- Includes Thin-Bezel Grilles held by Neo Magnets
- Diameter x Depth: 11⅛″ x 4½″
- Ceiling Cut Out: 9¾″

Signature C695s 6½″ Ceiling Speakers

ITEM	U/M
C695s	Pair

One pair of ceiling speakers with 6½″ Kevlar® woofers, cast magnesium woofer baskets, 1″ pivoting aluminum dome tweeters, +3dB bass & treble contour switches and 150 watt power handling.

- Replaces C646 Ceiling Speakers
- Power Handling: 150 Watts
- Frequency Response: 32Hz - 22kHz
- Impedance: 8Ω
- Sensitivity: 90dB 1W/1m
- Includes Thin-Bezel Grilles held by Neo Magnets
- Diameter x Depth: 9¼″ x 3 15⁄16″
- Ceiling Cut Out: 8¼″

Signature W695s 6½″ Inwall Speakers

ITEM	U/M
W695s	Pair

One pair of inwall speakers with 6½″ Kevlar® woofers, cast magnesium woofer baskets, 1″ pivoting aluminum dome tweeters, +3dB bass & treble contour switches and 150 watt power handling.

- Replaces W692 Inwall Speakers
- Power Handling: 150 Watts
- Frequency Response: 32Hz - 22kHz
- Impedance: 8Ω
- Sensitivity: 90dB 1W/1m
- Includes Thin-Bezel Grilles held by Neo Magnets
- Dimensions (H x W x D): 12¼″ x 8 3⁄16″ x 3⅜″
- Wall Cut Out (H x W): 10⅞″ x 6¾″

Whole-House Ceiling Speakers

Protege C801

ITEM	U/M
PAS11801	Pair

One pair of ceiling speakers with 8″ graphite woofers, 1″ pivoting aluminum dome tweeters, +3dB bass & treble contour switches and 150 watt power handling.

- Replaces C800 Ceiling Speakers
- Power Handling: 150 Watts
- Frequency Response: 28Hz - 22kHz
- Impedance: 8Ω
- Sensitivity: 92dB 1W/1m
- Includes Thin-Bezel Grilles held by Neo Magnets
- Diameter x Depth: 11⅛" x 4¼"
- Ceiling Cut Out: 9¾"

Protege C791

ITEM	U/M
PAS11791	Pair

One pair of ceiling speakers with 8″ polypropylene woofers, 1″ pivoting soft dome tweeters and 125 watt power handling.

- Replaces C790 Ceiling Speakers
- Power Handling: 125 Watts
- Frequency Response: 36Hz - 20kHz
- Impedance: 8Ω
- Sensitivity: 92dB 1W/1m
- Includes Thin-Bezel Grilles held by Neo Magnets
- Diameter x Depth: 11⅛" x 4¼"
- Ceiling Cut Out: 9¾"

Signature C695s

ITEM	U/M
C695s	Pair

One pair of ceiling speakers with 6½″ Kevlar® woofers, cast magnesium woofer baskets, 1″ pivoting aluminum dome tweeters, +3dB bass & treble contour switches and 150 watt power handling.

- Replaces C646 Ceiling Speakers
- Power Handling: 150 Watts
- Frequency Response: 32Hz - 22kHz
- Impedance: 8Ω
- Sensitivity: 90dB 1W/1m
- Includes Thin-Bezel Grilles held by Neo Magnets
- Diameter x Depth: 9¼" x 3 15/16"
- Ceiling Cut Out: 8¼"

Protege C641

ITEM	U/M
PAS11641	Pair

One pair of ceiling speakers with 6½″ graphite woofers, 1″ pivoting aluminum dome tweeters, +3dB bass & treble contour switches and 125 watt power handling.

- Replaces C640 Ceiling Speakers
- Power Handling: 125 Watts
- Frequency Response: 32Hz - 22kHz
- Impedance: 8Ω
- Sensitivity: 92dB 1W/1m
- Includes Thin-Bezel Grilles held by Neo Magnets
- Diameter x Depth: 9¼" x 3⅝"
- Ceiling Cut Out: 8¼"

Protege C626

ITEM	U/M
PAS11626	Pair

One pair of ceiling speakers with 6½″ graphite woofers, 1″ pivoting silk dome tweeters and 100 watt power handling.

- Replaces C625 Ceiling Speakers
- Power Handling: 100 Watts
- Frequency Response: 45Hz - 20kHz
- Impedance: 8Ω
- Sensitivity: 91dB 1W/1m
- Includes Thin-Bezel Grilles held by Neo Magnets
- Diameter x Depth: 9¼" x 4"
- Ceiling Cut Out: 8¼"

Whole-House Ceiling Speakers

Protege C635

ITEM	U/M
C635	Pair

One pair of ceiling speakers with 6½" aluminum woofers, 1" pivoting titanium dome tweeters and 100 watt power handling.

- New Ceiling Speakers
- Power Handling: 100 Watts
- Frequency Response: 40Hz - 22kHz
- Impedance: 8Ω
- Sensitivity: 92dB 1W/1m
- Includes Thin-Bezel Grilles held by Neo Magnets
- Diameter x Depth: 9¼" x 3¾"
- Ceiling Cut Out: 8¼"

Protege C621

ITEM	U/M
PAS11621	Pair

One pair of ceiling speakers with 6½" polypropylene woofers, 1" pivoting silk dome tweeters and 100 watt power handling.

- Replaces C620 Ceiling Speakers
- Power Handling: 100 Watts
- Frequency Response: 45Hz - 20kHz
- Impedance: 8Ω
- Sensitivity: 91dB 1W/1m
- Includes Thin-Bezel Grilles held by Neo Magnets
- Diameter x Depth: 9¼" x 3⅝"
- Ceiling Cut Out: 8¼"

Protege C612

ITEM	U/M
PAS11612	Pair

One pair of ceiling speakers with 6½" polypropylene woofers, 1" pivoting soft dome tweeters and 85 watt power handling.

- Replaces C610 Ceiling Speakers
- Power Handling: 85 Watts
- Frequency Response: 45Hz - 20kHz
- Impedance: 8Ω
- Sensitivity: 91dB 1W/1m
- Includes Thin-Bezel Grilles held by Neo Magnets
- Diameter x Depth: 9¼" x 3⅝"
- Ceiling Cut Out: 8¼"

Protege C606

ITEM	U/M
PAS11606	Pair

One pair of ceiling speakers with 6½" polypropylene woofers, ¾" soft dome tweeters and 75 watt power handling.

- Replaces C605 Ceiling Speakers
- Power Handling: 75 Watts
- Frequency Response: 45Hz - 20kHz
- Impedance: 8Ω
- Sensitivity: 90dB 1W/1m
- Includes Thin-Bezel Grilles held by Neo Magnets
- Diameter x Depth: 9¼" x 3⅝"
- Ceiling Cut Out: 8¼"

Protege C501

ITEM	U/M
PAS11501	Pair

One pair of ceiling speakers with 5¼" polypropylene woofers, ½" pivoting polyamide hard dome tweeters and 75 watt power handling.

- Replaces C500 Ceiling Speakers
- Power Handling: 75 Watts
- Frequency Response: 40Hz - 20kHz
- Impedance: 8Ω
- Sensitivity: 90dB 1W/1m
- Includes Thin-Bezel Grilles held by Neo Magnets
- Diameter x Depth: 7¾" x 3¼"
- Ceiling Cut Out: 6$^{11}/_{16}$"

LCR Speakers

Signature C1075s

ITEM	U/M
C1075s	Each

One LCR ceiling speaker with woofer and midrange/tweeter bridge fixed at a 15˚ angle. 10″ Kevlar® woofer, 3″ pivoting Kevlar® midrange, 1″ pivoting aluminum dome tweeter, ±3dB midrange & treble contour switches and 200 watt power handling. Required for installation, the included PCB-C1000 bracket is designed for new construction as well as retrofit applications.

- Replaces C1031 Ceiling LCR Speaker
- Power Handling: 200 Watts
- Frequency Response: 25Hz - 22kHz
- Impedance: 4Ω
- Sensitivity: 94dB 1W/1m
- Includes Thin-Bezel Grille held by Neo Magnets
- Diameter x Depth: 13⅜″ x 7⅞″
- Ceiling Cut Out: 11⅞″

Signature C875s

ITEM	U/M
C875s	Each

One LCR ceiling speaker with woofer and tweeter bridge fixed at a 15˚ angle. 8″ Kevlar® woofer and 1″ pivoting aluminum dome tweeter, ±3dB bass & treble contour switches and 175 watt power handling.

- Replaces C871 Ceiling LCR Speaker
- Power Handling: 175 Watts
- Frequency Response: 28Hz - 22kHz
- Impedance: 8Ω
- Sensitivity: 92dB 1W/1m
- Includes Thin-Bezel Grille held by Neo Magnets
- Diameter x Depth: 11⅛″ x 5¾″
- Ceiling Cut Out: 9¾″

Protege C841

ITEM	U/M
PAS13841	Each

One LCR ceiling speaker with woofer and tweeter bridge fixed at a 15˚ angle. 8″ graphite woofer and 1″ pivoting silk dome tweeter, ±3dB bass & treble contour switches and 150 watt power handling.

- Replaces C840 Ceiling LCR Speaker
- Power Handling: 150 Watts
- Frequency Response: 40Hz - 22kHz
- Impedance: 8Ω
- Sensitivity: 92dB 1W/1m
- Includes Thin-Bezel Grille held by Neo Magnets
- Diameter x Depth: 11⅛″ x 5⅞″
- Ceiling Cut Out: 9¾″

Signature C675s

ITEM	U/M
C675s	Each

One LCR ceiling speaker with woofer and tweeter bridge fixed at a 15˚ angle. 6½″ Kevlar® woofer and 1″ pivoting aluminum dome tweeter and 125 watt power handling.

- New Ceiling LCR Speaker
- Power Handling: 125 Watts
- Frequency Response: 32Hz - 22kHz
- Impedance: 8Ω
- Sensitivity: 90dB 1W/1m
- Includes Thin-Bezel Grille held by Neo Magnets
- Diameter x Depth: 9¼″ x 3¹⁵⁄₁₆″
- Ceiling Cut Out: 8¼″

Protege C661

ITEM	U/M
PAS13661	Each

One LCR ceiling speaker with woofer and tweeter bridge fixed at a 15˚ angle. 6½″ graphite woofer and 1″ pivoting aluminum dome tweeter and 125 watt power handling.

- Replaces C660 Ceiling LCR Speaker
- Power Handling: 125 Watts
- Frequency Response: 36Hz - 22kHz
- Impedance: 8Ω
- Sensitivity: 92dB 1W/1m
- Includes Thin-Bezel Grille held by Neo Magnets
- Diameter x Depth: 9¼″ x 4⁹⁄₁₆″
- Ceiling Cut Out: 8¼″

LCR Speakers

Protege C651

ITEM	U/M
PAS13651	Each

One LCR ceiling speaker with woofer and tweeter bridge fixed at a 15° angle. 6½" polypropylene woofer and 1" pivoting silk dome tweeter and 100 watt power handling.

- Replaces C650 Ceiling LCR Speaker
- Power Handling: 100 Watts
- Frequency Response: 45Hz - 20kHz
- Impedance: 8Ω
- Sensitivity: 91dB 1W/1m
- Includes Thin-Bezel Grille held by Neo Magnets
- Diameter x Depth: 9¼" x 4⁹⁄₁₆"
- Ceiling Cut Out: 8¼"

Signature IW675s

ITEM	U/M
IW675s	Each

One inwall LCR speaker with two 6½" Kevlar® woofers, 1" pivoting aluminum dome tweeter, ±3dB bass & treble contour switches and 150 watt power handling. Fits horizontally between 16" on-center wall studs.

- Replaces IW655 Inwall LCR Speaker
- Power Handling: 150 Watts
- Frequency Response: 40Hz - 22kHz
- Impedance: 8Ω
- Sensitivity: 90dB 1W/1m
- Includes Thin-Bezel Grille held by Neo Magnets
- Dimensions (H x W x D): 9" x 16⅛" x 3⅜"
- Wall Cut Out (H x W): 7½" x 14½"

Protege IW630

ITEM	U/M
PAS22630	Each

One inwall LCR speaker with two 6½" graphite woofers, 1" pivoting soft dome tweeter, ±3dB bass & treble contour switches and 125 watt power handling. Fits horizontally between 16" on-center wall studs.

- Replaces IW625 Inwall LCR Speaker
- Power Handling: 125 Watts
- Frequency Response: 55Hz - 20kHz
- Impedance: 8Ω
- Sensitivity: 90dB 1W/1m
- Includes Thin-Bezel Grille held by Neo Magnets
- Dimensions (H x W x D): 9" x 16⅛" x 3"
- Wall Cut Out (H x W): 7½" x 14½"

Signature IW575s

ITEM	U/M
IW575s	Each

One inwall LCR speaker with two 5¼" Kevlar® woofers, 1" pivoting aluminum dome tweeter, ±3dB bass & treble contour switches and 125 watt power handling.

- Replaces IW555 Inwall LCR Speaker
- Power Handling: 125 Watts
- Frequency Response: 50Hz - 22kHz
- Impedance: 8Ω
- Sensitivity: 88dB 1W/1m
- Includes Thin-Bezel Grille held by Neo Magnets
- Dimensions (H x W x D): 8" x 15¹⁵⁄₁₆" x 3⅜"
- Wall Cut Out (H x W): 6³⁄₁₆" x 14½"

Protege IW530

ITEM	U/M
PAS22530	Each

One inwall LCR speaker with two 5¼" graphite woofers, 1" pivoting aluminum dome tweeter, ±3dB bass & treble contour switches and 100 watt power handling.

- Replaces IW525 Inwall LCR Speaker
- Power Handling: 100 Watts
- Frequency Response: 65Hz - 20kHz
- Impedance: 8Ω
- Sensitivity: 88dB 1W/1m
- Includes Thin-Bezel Grille held by Neo Magnets
- Dimensions (H x W x D): 8" x 15¹⁵⁄₁₆" x 3⁷⁄₁₆"
- Wall Cut Out (H x W): 6³⁄₁₆" x 14½"

Whole-House Inwall Speakers

Protege W802

ITEM	U/M
PAS21802	Pair

One pair of inwall speakers with 8″ graphite woofers, 1″ pivoting aluminum dome tweeters, +3dB bass & treble contour switches and 150 watt power handling.

- Replaces W800 Inwall Speakers
- Power Handling: 150 Watts
- Frequency Response: 28Hz - 22kHz
- Impedance: 8Ω
- Sensitivity: 92dB 1W/1m
- Includes Thin-Bezel Grilles held by Neo Magnets
- Dimensions (H x W x D): 14⅞″ x 10⅛″ x 3¾″
- Wall Cut Out (H x W): 13⅝″ x 8¾″

Signature W695s

ITEM	U/M
W695s	Pair

One pair of inwall speakers with 6½″ Kevlar® woofers, cast magnesium woofer baskets, 1″ pivoting aluminum dome tweeters, +3dB bass & treble contour switches and 150 watt power handling.

- Replaces W692 Inwall Speakers
- Power Handling: 150 Watts
- Frequency Response: 32Hz - 22kHz
- Impedance: 8Ω
- Sensitivity: 90dB 1W/1m
- Includes Thin-Bezel Grilles held by Neo Magnets
- Dimensions (H x W x D): 12¼″ x 8³⁄₁₆″ x 3⅜″
- Wall Cut Out (H x W): 10⅞″ x 6¾″

Protege W672

ITEM	U/M
PAS21672	Pair

One pair of inwall speakers with 6½″ polypropylene woofers, 1″ pivoting silk dome tweeters and 100 watt power handling.

- Replaces W667 Inwall Speakers
- Power Handling: 100 Watts
- Frequency Response: 36Hz - 20kHz
- Impedance: 8Ω
- Sensitivity: 91dB 1W/1m
- Includes Thin-Bezel Grilles held by Neo Magnets
- Dimensions (H x W x D): 12¼″ x 8³⁄₁₆″ x 3⅛″
- Wall Cut Out (H x W): 10⅞″ x 6¾″

Twin-Tweeter Ceiling Speakers

Protege C825TT

ITEM	U/M
PAS12825	Each

One ceiling speaker with 8″ dual voice coil graphite woofer, two 1″ pivoting aluminum dome tweeters, +3dB bass & treble contour switches and 150 watt power handling.

- Replaces C800TT Single Stereo Ceiling Speaker
- Power Handling: 150 Watts
- Frequency Response: 28Hz - 22kHz
- Impedance: 8Ω
- Sensitivity: 92dB 1W/1m
- Includes Thin-Bezel Grille held by Neo Magnets
- Diameter x Depth: 11⅛″ x 4¼″
- Ceiling Cut Out: 9¾″

Protege C625TT

ITEM	U/M
PAS12625	Each

One ceiling speaker with 6½″ dual voice coil polypropylene woofer, two ½″ hard dome tweeters and 75 watt power handling.

- Replaces C600TT Single Stereo Ceiling Speaker
- Power Handling: 75 Watts
- Frequency Response: 36Hz - 20kHz
- Impedance: 8Ω
- Sensitivity: 92dB 1W/1m
- Includes Thin-Bezel Grille held by Neo Magnets
- Diameter x Depth: 9¼″ x 3⅝″
- Ceiling Cut Out: 8¼″

The New Generation of

THE NEXT EVOLUTION OF Sunfire® TECHNOLOGY

The Legacy Lives On

Proficient® Subwoofers.

The 2021 lineup of Proficient® Audio Subwoofers adds heavyweight performers to each performance series. Building on the legacy of innovation and technology from our Sunfire® subwoofers the Reference, Signature and Protege Series of Subwoofers are ready to bring the bass.

With legendary High Back EMF design allowing for an ultra-compact power to size ratio the new subwoofers are setting a new standard for bass performance. These high-powered subwoofers deliver an immersive audio experience that can both be felt and heard.

2021 brings an added focus on wireless technologies led by the Sub Station app to control subwoofer tuning and auto EQ with DSP and room correction. The redesigned wireless audio kit now transmits at 5Ghz frequency for an interference-free bass experience. Whether you are using a single sub or multiple, Proficient Audio gives you the flexibility to achieve the best possible sound for any room.

Powered Subwoofers

Reference FTEQ-12 Dual 12" Subwoofer

ITEM	U/M
FTEQ12	Each

Featuring dual 12" force-cancelling active Kevlar drivers, Dual Monoblock Class D Amplifier with 500 Watt RMS and 1000 Watt Peak, with onboard DSP that offers wireless setup and control via a mobile device app. Luxury Piano Black Cabinet.

- Amplifier Type: Class D Amp
- Power Rating Continuous: 500 Watts x2 RMS
- Power Rating Peak: 1000 Watts x2 Peak
- Frequency Response: 17Hz - 200Hz
- Inputs: RCA and XLR Balanced
- Outputs: RCA and XLR Balanced
- Voltage: 100v-240v, 50Hz - 60Hz Selectable
- APP Based DSP with Auto Room Correction
- Phase Switch: 0 - 180˚ Variable
- Crossover: 40Hz - 500Hz
- Finish: Luxury Piano Black Cabinet
- Dampened Rubber Feet
- Dimensions (H x W x D): 19.2" x 18.1" x 17.7"
- Weight: 102.5 lbs

Signature FRS-12 12" Subwoofer

ITEM	U/M
FRS12	Each

A high excursion, fiber-glass reinforced 12" front-firing woofer, Class D Amplifier with 500 Watt RMS and 1000 Watt Peak. App based tuning includes auto-EQ function with digital room correction and DSP. Luxury piano black cabinet.

- Amplifier Type: Class D Amp
- Power Rating Continuous: 500 Watts RMS
- Power Rating Peak: 1000 Watts Peak
- Frequency Response: 20Hz - 200Hz
- Inputs: Left & Right Line Level, LFE
- Outputs: Line Level High-Pass
- Voltage: 100v - 240v, 50Hz - 60Hz Selectable
- APP Based DSP with Auto Room Correction
- Phase Switch: 0 - 180˚ Variable
- Crossover: 40Hz - 500Hz; Bypass
- Finish: Luxury Piano Black Cabinet
- Dampened Rubber Feet
- Dimensions (H x W x D): 13.8" x 14.2" x 14.6"
- Weight: 41.9 lbs

Signature FRS-10 10" Subwoofer

ITEM	U/M
FRS10	Each

A high excursion, fiber-glass reinforced 10" front-firing woofer, Class D Amplifier with 500 Watt RMS and 1000 Watt Peak. App based tuning includes auto-EQ function with digital room correction and DSP. Luxury Luxury piano black cabinet.

- Amplifier Type: Class D Amp
- Power Rating Continuous: 500 Watts RMS
- Power Rating Peak: 1000 Watts Peak
- Frequency Response: 24Hz - 200Hz
- Inputs: Left & Right Line Level, LFE
- Outputs: Line Level High-Pass
- Voltage: 100v - 240v, 50Hz-60Hz Selectable
- APP Based DSP with Auto Room Correction
- Phase Switch: 0 - 180˚ Variable
- Crossover: 40Hz - 500Hz; Bypass
- Finish: High-Gloss Black MDF Cabinet
- Dampened Rubber Feet
- Dimensions (H x W x D): 12.2" x 12.6" x 13"
- Weight: 34.6 lbs

Signature FRS-8 8" Subwoofer

ITEM	U/M
FRS8	Each

A high excursion, fiber-glass reinforced 8" front-firing woofer, Class D Amplifier with 300 Watt RMS and 1000 Watt Peak. App based tuning includes auto-EQ function with digital room correction and DSP. Luxury piano black cabinet.

- Amplifier Type: Class D Amp
- Power Rating Continuous: 300 Watts RMS
- Power Rating Peak: 1000 Watts Peak
- Frequency Response: 24Hz - 200Hz
- Inputs: Left & Right Line Level, LFE
- Outputs: Line Level High-Pass
- Voltage: 100v - 240v, 50Hz - 60Hz Selectable
- APP Based DSP with Auto Room Correction
- Phase Switch: 0 - 180˚ Variable
- Crossover: 40Hz - 500Hz; Bypass
- Finish: High-Gloss Black MDF Cabinet
- Dampened Rubber Feet
- Dimensions (H x W x D): 10.3" x 10.7" x 11.1"
- Weight: 22.5 lbs

Powered Subwoofers

Protege FDS-15 Triple 15" Subwoofer

ITEM	U/M
FDS15	Each

Featuring triple 15" polypropylene drivers with single active woofer and dual passive radiators. Powered by a Class D amplifier with 500 Watt RMS and 1000 Watt Peak. Matte black finished cabinet with built-In 5V USB with integrated mount for supported wireless audio kit.

- Amplifier Type: Class D Amp
- Power Rating Continuous: 500 Watts RMS
- Power Rating Peak: 1000 Watts Peak
- Frequency Response: 19Hz - 160Hz
- Inputs: Left & Right Line Level, LFE
- Outputs: Line Level High-Pass
- Voltage: 100v - 240v, 50Hz - 60Hz Selectable
- Phase Switch: 0 - 180˚
- Crossover: 50Hz - 160Hz
- Finish: Matte Black Finish
- Dampened Rubber Feet
- Dimensions (H x W x D): 19" x 20" x 19.75"
- Weight: 65.5 lbs

Protege FDS-12 Triple 12" Subwoofer

ITEM	U/M
FDS12	Each

Featuring triple 12" polypropylene drivers with single active woofer and dual passive radiators. Powered by a Class D amplifier with 300 Watt RMS and 600 Watt Peak. Matte black finished cabinet with built-In 5V USB with integrated mount for supported wireless audio kit.

- Amplifier Type: Class D Amp
- Power Rating Continuous: 300 Watts RMS
- Power Rating Peak: 600 Watts Peak
- Frequency Response: 24Hz - 160Hz
- Inputs: Left & Right Line Level, LFE
- Outputs: Line Level High-Pass
- Voltage: 100v - 240v, 50Hz - 60Hz Selectable
- Phase Switch: 0 - 180˚
- Crossover: 50Hz - 160Hz
- Finish: Matte Black Finish
- Dampened Rubber Feet
- Dimensions (H x W x D): 14.75" x 15.46" x 15.5"
- Weight: 37.7 lbs

Protege FDS-10 Triple 10" Subwoofer

ITEM	U/M
FDS10	Each

Featuring triple 10" polypropylene drivers with single active woofer and dual passive radiators. Powered by a Class D amplifier with 250 Watt RMS and 500 Watt Peak. Matte black finished cabinet with built-In 5V USB with integrated mount for supported wireless audio kit.

- Amplifier Type: Class D Amp
- Power Rating Continuous: 250 Watts RMS
- Power Rating Peak: 500 Watts Peak
- Frequency Response: 24Hz - 160Hz
- Inputs: Left & Right Line Level, LFE
- Outputs: Line Level High-Pass
- Voltage: 100v - 240v, 50Hz - 60Hz Selectable
- Phase Switch: 0 - 180˚
- Crossover: 50Hz - 160Hz
- Finish: Matte Black Finish
- Dampened Rubber Feet
- Dimensions (H x W x D): 13.9" x 13.87" x 13.15"
- Weight: 30.1 lbs

Protege FDS-8 Triple 8" Subwoofer

ITEM	U/M
FDS8	Each

Featuring triple 8" polypropylene drivers with single active woofer and dual passive radiators. Powered by a Class D amplifier with 200 Watt RMS and 400 Watt Peak. Matte black finished cabinet with built-In 5V USB with integrated mount for supported wireless audio kit.

- Amplifier Type: Class D Amp
- Power Rating Continuous: 200 Watts RMS
- Power Rating Peak: 400 Watts Peak
- Frequency Response: 29Hz - 160Hz
- Inputs: Left & Right Line Level, LFE
- Outputs: Line Level High-Pass
- Voltage: 100v - 240v, 50Hz - 60Hz Selectable
- Phase Switch: 0 - 180˚
- Crossover: 50Hz - 160Hz; Bypass
- Finish: Matte Black Finish
- Dampened Rubber Feet
- Dimensions (H x W x D): 11.73" x 12.44" x 12.48"
- Weight: 23.3 lbs

Powered Subwoofers

Protege FS12 12″ Floor Standing Sub

ITEM	U/M
FS12	Each

One dual-drive subwoofer with 12″ front-firing polypropylene-coated fiber composite woofer, 12″ down-firing passive radiator and Class D Amp with 300 watts RMS, 600 watts peak. Anti-clipping circuitry assures high output with low distortion. Black wood grain vinyl finish and dampened rubber feet.

- Amplifier Type: Class D Amp
- Power Rating Continuous: 300 Watts RMS
- Power Rating Peak: 600 Watts Peak
- Frequency Response: 28Hz - 150Hz
- Subwoofer Output: 106dB SPL
- Inputs: Left & Right Line Level, LFE
- Outputs: Line Level High-Pass
- Protection: Anti-Clipping Circuitry
- Power On/Off: Auto Sensing
- Phase Switch: 0 - 180˚
- Crossover: 50Hz - 150Hz; Bypass
- Finish: Black Wood Grain Vinyl
- Dampened Rubber Feet
- Dimensions (H x W x D): 16⅝″ x 14½″ x 15½″
- Weight: 35 lbs

Protege FS10 10″ Floor Standing Sub

ITEM	U/M
FS10	Each

One dual-drive subwoofer with 10″ front-firing polypropylene-coated fiber composite woofer, 10″ down-firing passive radiator and Class D Amp with 250 watts RMS, 500 watts peak. Anti-clipping circuitry assures high output with low distortion. Black wood grain vinyl finish and dampened rubber feet.

- Amplifier Type: Class D Amp
- Power Rating Continuous: 250 Watts RMS
- Power Rating Peak: 500 Watts Peak
- Frequency Response: 30Hz - 150Hz
- Subwoofer Output: 103dB SPL
- Inputs: Left & Right Line Level, LFE
- Outputs: Line Level High-Pass
- Protection: Anti-Clipping Circuitry
- Power On/Off: Auto Sensing
- Phase Switch: 0 - 180˚
- Crossover: 50Hz - 150Hz; Bypass
- Finish: Black Wood Grain Vinyl
- Dampened Rubber Feet
- Dimensions (H x W x D): 15⅛″ x 13¼″ x 14″
- Weight: 27 lbs

Protege FS8 8″ Floor Standing Sub

ITEM	U/M
FS8	Each

One dual-drive subwoofer with 8″ front-firing polypropylene-coated fiber composite woofer, 8″ down-firing passive radiator and Class D Amp with 200 watts RMS, 400 watts peak. Anti-clipping circuitry assures high output with low distortion. Black wood grain vinyl finish and dampened rubber feet.

- Amplifier Type: Class D Amp
- Power Rating Continuous: 200 Watts RMS
- Power Rating Peak: 400 Watts Peak
- Frequency Response: 32Hz - 150Hz
- Subwoofer Output: 100dB SPL
- Inputs: Left & Right Line Level, LFE
- Outputs: Line Level High-Pass
- Protection: Anti-Clipping Circuitry
- Power On/Off: Auto Sensing
- Phase Switch: 0 - 180˚
- Crossover: 50Hz - 150Hz; Bypass
- Finish: Black Wood Grain Vinyl
- Dampened Rubber Feet
- Dimensions (H x W x D): 13⅝″ x 11¾″ x 12½″
- Weight: 20 lbs

PAS-WIR-SUB-KIT Wireless Audio Subwoofer Kit

U/M
Kit

Consisting of one transmitter and one receiver the wireless audio receiver mounts to the back of the subwoofer. Expand your system with up to three additional receivers.

- Wireless connectivity range of 30 + feet
- Interference free - 5Ghs FHSS Technology
- Receiver mounts directly to the subwoofer
- Kit can expand up to four receivers
- All cables included

PAS-WIR-RX Wireless Audio Subwoofer Receiver

U/M
Each

Additional Receiver for Subwoofer Wireless Audio Kit. Each transmitter can accomodate up to four receivers.

- Wireless connectivity range of 30+ feet
- Interference free - 5Ghs FHSS Technology
- Receiver mounts directly to the subwoofer
- USB powered directly from Subwoofer USB port
- All cables included

Passive Architectural Subwoofers

Signature PAS-HRSIW8-CAB Dual 8" Inwall Sub

U/M Each

Dual 8" Woofers with fiber glass cones with 150 Watt-600 Watt Peak. Sealed cabinet with integrated wire management and vibration-free inwall design. Paintable, thin-bezel, magnetic grille.

- High Back-EMF Efficiency Design
- Power: 150 Watt - 600 Watt Peak
- Frequency Response: 33Hz - 150Hz
- Paintable Thin-Bezel Magnetic Grille
- Requires Matching HRSIW8AMP
- Dimensions (H x W x D): 24.6" x 12.05" x 3.75"
- Weight: 32 lbs
- Retrofit Compatible with Dog Legs

Protege IWS105 10" Inwall Sub

ITEM PAS24105 **U/M** Each

Inwall passive subwoofer with a 10" long excursion treated paper cone woofer and inverted ferrite magnet structure with a power handling capacity of 250 watts. Designed to be used with the Proficient M3 Amp/Crossover. For new construction, use the optional BB-IWS10 MDF back box.

- Replaces IWS100 Inwall Sub
- Power Handling: 250 Watts
- Frequency Response: 36Hz - 150Hz
- Includes Thin-Bezel Grille held by Neo Magnets
- Dimensions (H x W x D): 13⅝" x 13⅝" x 3¾"
- Wall Cut Out (H x W): 12 1/16" x 12 1/16"
- Use with M3 Amplifier

Sunfire HRSIW8AMP Amplifier for PAS-HRSIW8-CAB

U/M Each

The 520 Watt, Class D HRSIW8AMP amplifier is specifically designed to supply speaker-level power to the PAS-HRSIW8 in-wall subwoofer, to produce stunning low frequency effects for your home theater.

- RMS Power of 520 Watts
- Crossover Filters 12 - 36 dB/Octave Adjustable Slope
- Crossover Frequency 40 Hz - 160 Hz Adjustable, with LFE Bypass
- RCA Line Level, Balanced XLR Signal Inputs
- Pre-Programmed IR Remote Control
- Includes Bolt-On Rack Ears
- Dimensions (H x W x D): 23.3" x 16.2" x 5.8
- Weight: 21 lbs

M3 Amp/Crossover

ITEM PAS72300 **U/M** Each

180 watt high-current mono amp with built-in crossover network. Crossover features adjustments for subwoofer fine-tuning to individual room acoustics. Includes bolt-on rack ears.

- Use with Proficient Inwall & Ceiling Architectural Subs
- Premium Cast Aluminum Faceplate
- Power: 180 Watts Single Channel
- Variable Low Pass Crossover: 35Hz - 150Hz
- LFE Input & Pass Through Output
- Phase Switch
- Includes Bolt-On Rack Ears
- Remote Power-On Switching via Signal Sensing
- Dimensions (H x W x D): 4" x 17⅛" x 12⅝"
- Weight: 18 lbs

BB-IWS10 Back Box

ITEM PAS02100 **U/M** Each

Medium Density Fiberboard (MDF) back box for the IWS105 inwall sub, designed to fit any standard 16" stud bay. Cuts down on translational energy vibration between adjacent walls. The IWS105 sub is tuned to the BB-IWS10 back box. Not for use with ICS11.

- Dimensions (H x W x D): 42¾" x 14⅜" x 3¼"

Explore the Sounds of

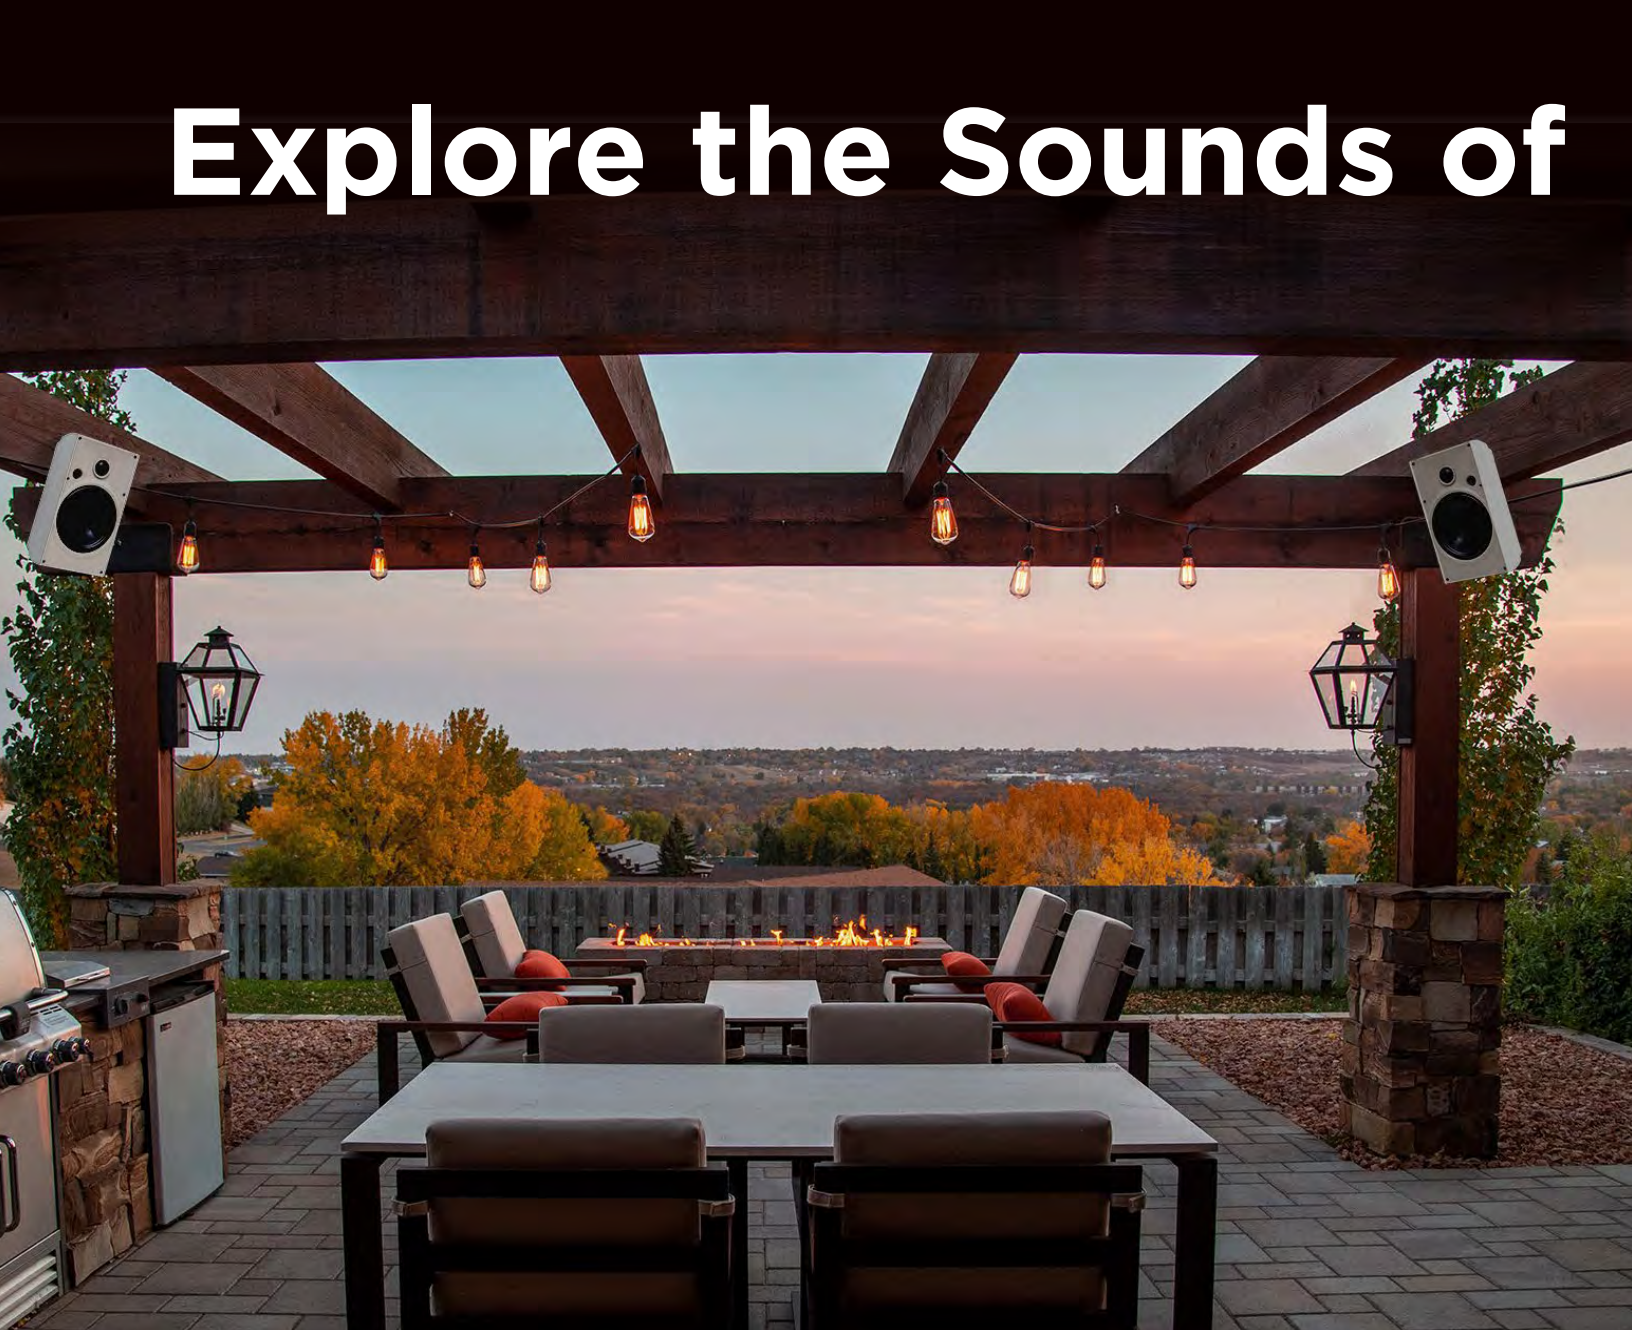

the Great Outdoors.

Proficient® Audio all-weather, outdoor landscape speakers, cabinet speakers and rock speakers take the audio entertainment experience outside for listening pleasure in every environment. Totally scalable, Proficient Audio speaker solutions can cover small to large landscapes, patios, poolside and beyond.

Our top of the line series of Signature Speakers are designed to create an umnatched outdoor audio experience for the most discerning ear. With the more expansive lineup of Protege models offering an unbeatable blend of performance, styles and quality.

The always dependable outdoor/indoor hanging cabinet speakers round out our comprehensive all-weather audio solutions and wow with their superior sound and installation flexibility.

Proficient Audio outdoor sound systems perform under the harshest conditions and will elevate your backyard entertainment with years of premium long-lasting sound.

Outdoor / All-Weather Speakers

Durable enough to withstand the elements, elegant enough for the living room

AW830wht | blk

WHT	BLK	U/M
PAS42830	PAS42833	Pair

One pair of indoor/outdoor speakers with 8″ polypropylene woofers, 3″ graphite midrange, 1″ pivoting soft dome tweeters and 175 watt power handling. Includes swivel mounting brackets. ***Order in white or black.***

- Power Handling: 175 Watts
- Frequency Response: 35Hz - 20kHz
- Impedance: 4Ω
- Sensitivity: 89dB 1W/1m
- Dimensions (H x W x D): 15¾″ x 8¾″ x 8¾″

AW650wht | blk

WHT	BLK	U/M
PAS41650	PAS41653	Pair

One pair of indoor/outdoor speakers with 6½″ polypropylene woofers, 1″ pivoting Supernil soft dome tweeters and 150 watt power handling. Includes swivel mounting brackets. ***Order in white or black.***

- Power Handling: 150 Watts
- Frequency Response: 37Hz - 20kHz
- Impedance: 8Ω
- Sensitivity: 89dB 1W/1m
- Dimensions (H x W x D): 11″ x 7″ x 6¼″

AW525wht | blk

WHT	BLK	U/M
PAS41525	PAS41527	Pair

One pair of indoor/outdoor speakers with 5¼″ polypropylene woofers, 1″ pivoting Supernil soft dome tweeters and 125 watt power handling. Includes swivel mounting brackets. ***Order in white or black.***

- Power Handling: 125 Watts
- Frequency Response: 45Hz - 20kHz
- Impedance: 8Ω
- Sensitivity: 88dB 1W/1m
- Dimensions (H x W x D): 9³⁄₁₆″ x 6½″ x 6⅜″

AW400wht | blk

WHT	BLK	U/M
PAS41400	PAS41403	Pair

One pair of indoor/outdoor speakers with 4″ polypropylene woofers, ¾″ Supernil soft dome tweeters and 100 watt power handling. Includes swivel mounting brackets. ***Order in white or black.***

- Power Handling: 100 Watts
- Frequency Response: 55Hz - 20kHz
- Impedance: 8Ω
- Sensitivity: 87dB 1W/1m
- Dimensions (H x W x D): 7¾″ x 5½″ x 5½″

Outdoor / Indoor Twin-Tweeter Speakers

Durable enough to withstand the elements, elegant enough for the living room

AW500TTwht | blk

WHT	BLK	U/M
PAS42500	PAS42503	Each

One indoor/outdoor speaker with 5¼" dual voice coil polypropylene woofer, two 1" pivoting Supernil soft dome tweeters and 100 watt power handling. Weather-resistant ABS housing, powder coated aluminum grille. Includes swivel mounting bracket.
Order in white or black.

- Power Handling: 100 Watts
- Frequency Response: 60Hz - 20kHz
- Impedance: 4Ω
- Sensitivity: 89dB 1W/1m
- Dimensions (H x W x D): 7" x 11" x 6¼"

Signature Landscape Speakers

Signature PAS-AW-GSBSUB-12

U/M
Each

High performance 12" Mica-injected polypropylene in-ground subwoofer with 500 watt power handling. Weather proof HDPE buried enclosure with critter proof port assembly.

- Power Handling: Up to 500 Watts
- Frequency Response: 28Hz - 120kHz
- Impedance: 8Ω
- Sensitivity: 86dB
- Weight: 42.1 lbs

Signature PAS-AW-GSBSUB-10

U/M
Each

High performance 10" Mica-injected polypropylene in-ground subwoofer with 300 watt power handling. Weather proof HDPE buried enclosure with critter proof port assembly.

- Power Handling: Up to 300 Watts
- Frequency Response: 30Hz - 120kHz
- Impedance: 8Ω
- Sensitivity: 86dB
- Weight: 44.75 lbs

Signature PAS-AW-LS-6

U/M
Each

High performance 6" two-way satellite speakers with polypropylene cone woofer and ¾" aluminum dome tweeter. Weather-resistant fiber glass reinforced ABS enclosure.

- Power Handling: Up to 120 Watts
- Frequency Response: 100Hz - 20kHz
- Sensitivity: 87dB
- Impedance per speaker: 8Ω (in bypass mode)
- Tap Settings: 70v/100v: 3.75w (70v only), 7.5w, 15w, 30w, 8Ω (bypass)
- Designed to pair with PAS-AW-GSBSUB-10/12
- Weight: 10 lbs

Signature PAS-AW-LS-4

U/M
Each

High performance 4" two-way satellite speakers with polypropylene cone woofer and ¾" aluminum dome tweeter. Weather-resistant fiber glass reinforced ABS enclosure.

- Power Handling: Up to 90 Watts
- Frequency Response: 110Hz - 20kHz
- Sensitivity: 84dB
- Impedance per speaker: 8Ω (in bypass mode)
- Tap Settings: 70v/100v: 3.75w (70v only), 7.5w, 15w, 30w, 8Ω (bypass)
- Designed to pair with PAS-AW-GSBSUB-10/12
- Weight: 7.75 lbs

Signature Landscape Speaker Accessories

Landscape Speaker Stake Mount

ITEM	U/M
AW-LS-Stake	Each

The Landscape Speaker Stake Mount is the most popular mounting method for the Landscape Satellite speakers and features a reinforced fluted tubular design that easily penetrates dense soil and provides a solid mounting platform. The quick connect design eliminates rotation of the speaker onto the mounting accessory eliminating a common failure point in other landscape products.

- For use with PAS-AW-LS-6 / PAS-AW-LS-4
- 12” stake mount for in-ground mounting
- Quick connect design for easy assembly
- Dimensions: 3-3/4” x 3-3/4” x 13”
- Sold individually

Landscape Speaker Surface Mount

ITEM	U/M
AW-LS-Mount	Each

The Landscape Speaker Surface Mount is designed for installations that require surface mounting like on a wall or deck. The durable die-cast aluminum construction is sturdy, features a quick connect design and includes a tool that locks the speaker in place for long term durability.

- For use with PAS-AW-LS-6 / PAS-AW-LS-4
- Designed for mounting to flat surfaces like walls or decks
- Quick connect design for easy assembly
- Dimensions: 3-15/16” x 3-15/16” x 1-7/8”
- Sold individually

Landscape Speaker Conduit Box Mount

ITEM	U/M
AW-LS-Conduit	Each

The Landscape Speaker Conduit Box is designed for installations using underground wire distribution using PVC conduit. The conduit box includes ample room for wire termination as well as a removeable cover and multiple knockouts that prevent water intrusion. Featuring a stable base with aluminum spike reinforcement, the conduit box creates a robust mounting platform while the quick connect design eliminates rotation of the speaker onto the mounting accesory eliminating a common failure point in other landscape products.

- For use with PAS-AW-LS-6 / PAS-AW-LS-4
- Speaker mount for installations that use speaker wire in underground conduit
- Doubles as a wiring junction box
- Designed for use with standard .75” conduit
- Stable base with aluminum spike reinforcement
- Quick connect design for easy assembly
- Includes additional 2” (50mm) extension arm for adjustable speaker height
- Dimensions:
  5-7/8” x 5-7/8” x 7-1/3” (without extension)
  5-7/8” x 5-7/8” x 9-1/3” (with extension)

Protege Landscape Speakers

Protege PAS-4.1-BU

ITEM	U/M
PAS-4.1-BU	Kit

Includes 4 x 4" weatherproof satellite speakers with polypropylene cone woofer and ¾" titanium dome tweeter, weatherproof 8" burial DVC (Dual Voice Coil) subwoofer with polypropylene cone. Includes quick connect stakes.

- Power Handling: 150 Watts
- Frequency Response: 34Hz - 20kHz
- Shipping Dimensions (H x W x D): 34" x 24" x 17.75"
- Impedance: 8Ω
- Expandable to 8.2
- Shipping Weight: 39 lbs

Protege PAS-4.1-HS

ITEM	U/M
PAS-4.1-HS	Kit

Includes 4 x 4" weatherproof satellite speakers with polypropylene cone woofer and ¾" titanium dome tweeter, weatherproof 8" hardscape DVC (Dual Voice Coil) subwoofer with polypropylene cone. Includes quick connect stakes.

- Power Handling: 150 Watts
- Frequency Response: 38Hz - 20kHz
- Shipping Dimensions (H x W x D): 33.5" x 17.75" x 18"
- Impedance: 8Ω
- Expandable to 8.2
- Shipping Weight: 34 lbs

Protege PAS-2.0

ITEM	U/M
PAS-2.0	Pair

Includes 2 x 4" weatherproof satellite speakers with polypropylene cone woofer and ¾" titanium dome tweeter. Includes quick connect stakes.

- Power Handling: 100 Watts
- Frequency Response: 120Hz - 20kHz
- Shipping Dimensions (H x W x D): 17.5" x 10" x 17.9"
- Impedance per speaker:32Ω
- Designed to expandeither PAS-4.1-HS or PAS-4.1-BU
- Shipping Weight: 9.15 lbs

Rock and Planter Speakers

Protege PAS-RS8i-GRANITE

U/M
Each

Geo-realistic rock speakers with 8" DVC TCC polypropylene woofer, dual 1" Teteron tweeters and 10-200 watt power handling. ***Order in speckled granite, shale brown, granite, or sandstone.***

- Power Handling: Up to 200 Watts
- Frequency Response: 50Hz - 21kHz
- Impedance: 8Ω Stereo/ L/R Summed (parallel) 4Ω
- Sensitivity: 88dB
- Weather-Resistant Design
- Dimensions (H x W x D): 19.5" x 16.5" x 12.5"

Protege PAS-RS8i-SHALEBROWN

U/M
Each

Geo-realistic rock speakers with 8" DVC TCC polypropylene woofers, dual 1" Teteron tweeters and 10-200 watt power handling. ***Order in speckled granite, shale brown, granite, or sandstone.***

- Power Handling: Up to 200 Watts
- Frequency Response: 50Hz - 21kHz
- Impedance: 8Ω Stereo/ L/R Summed (parallel) 4Ω
- Sensitivity: 88dB
- Weather-Resistant Design
- Dimensions (H x W x D): 19.5" x 16.5" x 12.5"

Protege PAS-RS8i-SPECKLEDGRANITE

U/M
Each

Geo-realistic rock speakers with 8" DVC TCC polypropylene woofers, dual 1" Teteron tweeters and 10-200 watt power handling. ***Order in speckled granite, shale brown, granite, or sandstone.***

- Power Handling: Up to 200 Watts
- Frequency Response: 50Hz - 21kHz
- Impedance: 8Ω Stereo/ L/R Summed (parallel) 4Ω
- Sensitivity: 88dB
- Weather-Resistant Design
- Dimensions (H x W x D): 19.5" x 16.5" x 12.5"

Protege PAS-RS8i-SANDSTONE

U/M
Each

Geo-realistic rock speakers with 8" DVC TCC polypropylene woofers, dual 1" Teteron tweeters and 10-200 watt power handling. ***Order in speckled granite, shale brown, granite, or sandstone.***

- Power Handling: Up to 200 Watts
- Frequency Response: 50Hz - 21kHz
- Impedance: 8Ω Stereo/ L/R Summed (parallel) 4Ω
- Sensitivity: 88dB
- Weather-Resistant Design
- Dimensions (H x W x D): 19.5" x 16.5" x 12.5"

Rock and Planter Speakers

Protege PAS-RS6-GRANITE

U/M
Each

Geo-realistic rock speakers with 6.5″ TCC polypropylene woofer, 1″ Teteron tweeter and 10-150 watt power handling. ***Order in speckled granite, shale brown, granite, or sandstone.***

- Power Handling: Up to 150 Watts
- Frequency Response: 70Hz - 21kHz
- Impedance: 8Ω
- Sensitivity: 89dB
- Weather-Resistant Design
- Dimensions (H x W x D): 14″ x 11″ x 12″

Protege PAS-RS6-SHALEBROWN

U/M
Each

Geo-realistic rock speakers with 6.5″ TCC polypropylene woofers, 1″ Teteron tweeter and 10-150 watt power handling. ***Order in speckled granite, shale brown, granite, or sandstone.***

- Power Handling: Up to 150 Watts
- Frequency Response: 70Hz - 21kHz
- Impedance: 8Ω
- Sensitivity: 89dB
- Weather-Resistant Design
- Dimensions (H x W x D): 14″ x 11″ x 12″

Protege PAS-RS6-SPECKLEDGRANITE

U/M
Each

Geo-realistic rock speakers with 6.5″ TCC polypropylene woofers, 1″ Teteron tweeter and 10-150 watt power handling. ***Order in speckled granite, shale brown, granite, or sandstone.***

- Power Handling: Up to 150 Watts
- Frequency Response: 70Hz - 21kHz
- Impedance: 8Ω
- Sensitivity: 89dB
- Weather-Resistant Design
- Dimensions (H x W x D): 14″ x 11″ x 12″

Protege PAS-RS6-SANDSTONE

U/M
Each

Geo-realistic rock speakers with 6.5″ TCC polypropylene woofers, 1″ Teteron tweeter and 10-150 watt power handling. ***Order in speckled granite, shale brown, granite, or sandstone.***

- Power Handling: Up to 150 Watts
- Frequency Response: 70Hz - 21kHz
- Impedance: 8Ω
- Sensitivity: 89dB
- Weather-Resistant Design
- Dimensions (H x W x D): 14″ x 11″ x 12″

Protege PAS-PS6Si-CONCRETE

U/M
Each

Planter Speaker 6.5″ DVC TCC polypropylene woofer, dual 1″ Teteron tweeters and 10-100 watt power handling. ***Can be used with live plants.***

- Power Handling: Up to 100 Watts
- Frequency Response: 60Hz - 21kHz
- Impedance: 8Ω Stereo/ L/R Summed (parallel) 4Ω
- Sensitivity: 89dB
- Weather-Resistant Design
- Dimensions (H x W x D): 19.5″ x 19.5″ x 19.5″

Speaker Selectors

SS8P

ITEM	U/M
PAS71850	Each

Eight-pair resistor-based on/off speaker selector provides quick, convenient access for up to eight stereo pairs. 125 watts power handling per channel, rear override switch for circuit protection and suction feet for stable operation.

- Power Handling: 125 Watts per Channel
- Frequency Response: 20Hz - 20kHz
- Protection: Front Mounted Switch & Rear Override
- Includes Area Labels
- Dimensions (H x W x D): 2 3/16" x 17" x 6 13/32"

SS4P

ITEM	U/M
PAS71450	Each

Four-pair resistor-based on/off speaker selector provides quick, convenient access for up to four stereo pairs. 125 watts power handling per channel, rear override switch for circuit protection and suction feet for stable operation.

- Power Handling: 125 Watts per Channel
- Frequency Response: 20Hz - 20kHz
- Protection: Front Mounted Switch & Rear Override
- Includes Area Labels
- Dimensions (H x W x D): 2 3/16" x 8 3/8" x 6 13/32"

Volume Controls

VC60i

ITEM	U/M
PAS35377	Each

60-watt impedance-balancing volume control with autoformer. Features quick & secure wire connecting system. Fits in most single-gang J-boxes and plaster rings. Includes white, bone and almond plates, inserts and knobs.

- Power Handling Continuous: 60 Watts
- Power Handling Peak: 120 Watts
- Frequency Response: 20Hz - 20kHz
- Steps: 12 (Make Before Break)
- Total Attenuation: 42dB (Max)
- Depth: 2½" Behind Plate

VC60AW

ITEM	U/M
PAS34320G	Each

60-watt weather-resistant volume control sealed against dust and moisture. Fits onto ¾" conduit or can be surface mounted. ***Available in Gray.***

- Power Handling Continuous: 60 Watts
- Power Handling Peak: 120 Watts
- Frequency Response: 20Hz - 20kHz
- Steps: 12 (Make Before Break)
- Total Attenuation: 42dB (Max)
- Dimensions (H x W x D): H 4½" x W 2¾" x D 3½"

Pre-Construction Brackets

PCB-C800

ITEM	U/M
PCB11800	Pair

One pair of pre-construction brackets for new construction. Fits 8" 2-way, LCR & twin-tweeter ceiling speakers.

PCB-C600

ITEM	U/M
PCB11600	Pair

One pair of pre-construction brackets for new construction. Fits 6½" 2-way, LCR & twin-tweeter ceiling speakers.

PCB-C500

ITEM	U/M
PCB11500	Pair

One pair of pre-construction brackets for new construction. Fits 5¼" ceiling speakers.

PCB-W800

ITEM	U/M
PCB21800	Pair

One pair of pre-construction brackets for new construction. Fits 8" inwall speakers.

PCB-W600

ITEM	U/M
PCB21600	Pair

One pair of pre-construction brackets for new construction. Fits 6½" inwall speakers.

PCB-IW600

ITEM	U/M
PCB22600	Each

One each pre-construction bracket for new construction. Fits 6½" inwall LCR speakers.

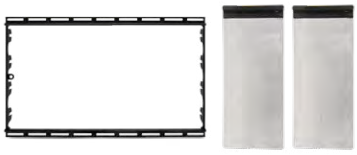

PCB-IW500

ITEM	U/M
PCB22500	Each

One each pre-construction bracket for new construction. Fits 5¼" inwall LCR speakers.

Ceiling Tile Brackets



CTB-C800

ITEM	U/M
CTB11801	Each

One each ceiling tile bracket used in drop ceiling and T-bar type ceiling applications. Fits 8″ 2-way, LCR & twin-tweeter ceiling speakers.

CTB-C600

ITEM	U/M
CTB11601	Each

One each ceiling tile bracket used in drop ceiling and T-bar type ceiling applications. Fits 6½″ 2-way, LCR & twin-tweeter ceiling speakers.

Back Boxes

BB-IWS10

ITEM	U/M
PAS02100	Each

Medium Density Fiberboard (MDF) back box for the IWS105 inwall sub, designed to fit any standard 16″ stud bay. Cuts down on translational energy vibration between adjacent walls. The IWS105 sub is tuned to the BB-IWS10 back box. ***Not for use with ICS11.***

- Dimensions (H x W x D): 42¾″ x 14⅜″ x 3¼″

BB-C800

ITEM	U/M
PAS01800	Each

One metal back box for 8″ 2-way, LCR & twin-tweeter ceiling speakers. ***UL 263-03 1-hour fire rating.***

BB-C650

ITEM	U/M
PAS01603	Each

One metal back box for 6½″ 2-way, LCR & twin-tweeter ceiling speakers. CMB-24 mounting bars are needed when installing in ceiling joists 24″ on-center or suspended ceilings. ***UL 263-03 1-hour fire rating.***

BB-W600

ITEM	U/M
PAS02600	Each

One metal back box for 6½″ inwall speakers. ***UL 263-03 1-hour fire rating.***



CMB-24

ITEM	U/M
PAS01000	Pair

One pair of ceiling mounting bars slip into clips on BB-C650 back box. For installation in ceiling joists 24″ on-center or suspended ceilings.

Speaker Cover Plates

CPC-800 8″ Ceiling Cover Plate

ITEM	U/M
PAS03800	Pair

One pair of white cover plates for 8″ 2-way, LCR & twin-tweeter ceiling speakers.

CPC-600 6.5″ Ceiling Cover Plate

ITEM	U/M
PAS03600	Pair

One pair of white cover plates for 6½″ 2-way, LCR & twin-tweeter ceiling speakers.

CPW-600 6.5″ Inwall Cover Plate

ITEM	U/M
PAS04600	Pair

One pair of white cover plates for 6½″ inwall speakers.

Replacement Speaker Grilles



Thin-Bezel 10″ Ceiling LCR Grille

ITEM	U/M
1001-131031	Each

Compatible with Proficient Signature 10″ Ceiling LCR Speakers.

Thin-Bezel 8″ Ceiling Grille

ITEM	U/M
1001-11801	Each

Compatible with Proficient Signature & Protege 8″ 2-Way, LCR & Twin-Tweeter Ceiling Speakers.

Thin-Bezel 6.5″ Ceiling Grille

ITEM	U/M
1001-11602	Each

Compatible with Proficient Signature & Protege 6½″ 2-Way, LCR & Twin-Tweeter Ceiling Speakers.

Thin-Bezel 5.25″ Ceiling Grille

ITEM	U/M
1001-11501	Each

Compatible with Proficient Protege 5¼″ Ceiling Speakers.



Thin-Bezel 6.5″ Ceiling Grille

ITEM	U/M
SRG-C6-SG	Each

Square Grille for 6 ½” Ceiling Speakers

Thin-Bezel 8″ Inwall Grille

ITEM	U/M
1001-21801	Each

Compatible with Proficient Signature & Protege 8″ Inwall Speakers.

Thin-Bezel 6.5″ Inwall Grille

ITEM	U/M
1001-21601	Each

Compatible with Proficient Signature & Protege 6½″ Inwall Speakers.

Replacement Speaker Grilles

Thin-Bezel 6.5″ Inwall LCR Grille

ITEM	U/M
1001-22630	Each

Compatible with Proficient Signature & Protege 6½″ Inwall LCR Speakers.

Thin-Bezel 5.25″ Inwall LCR Grille

ITEM	U/M
1001-22530	Each

Compatible with Proficient Signature & Protege 5¼″ Inwall LCR Speakers.

Thin-Bezel 10″ Inwall Sub Grille

ITEM	U/M
1001-24105-2	Each

Compatible with Proficient Protege IWS105 10″ Inwall Subwoofer.

Thin-Bezel 10″ Ceiling Sub Grille

ITEM	U/M
1001-13111	Each

Compatible with Proficient Protege ICS11 10″ Ceiling Subwoofer.



AW830 Grilles

WHT	BLK	U/M
1001-42830	1001-42833	Pair

Compatible with AW830 Outdoor/Indoor Speakers.

AW650 Grilles

WHT	BLK	U/M
1001-41650	1001-41653	Pair

Compatible with AW650 Outdoor/Indoor Speakers.

AW525 Grilles

WHT	BLK	U/M
1001-41525	1001-41527	Pair

Compatible with AW525 Outdoor/Indoor Speakers.

AW400 Grilles

WHT	BLK	U/M
1001-41400	1001-41403	Pair

Compatible with AW400 Outdoor/Indoor Speakers.

AW600TT Grille

WHT	BLK	U/M
1001-42600	1001-42603	Each

Compatible with AW600TT Twin-Tweeter Outdoor/Indoor Speakers.

AW500TT Grille

WHT	BLK	U/M
1001-42500	1001-42503	Each

Compatible with AW500TT Twin-Tweeter Outdoor/Indoor Speakers.

PROFICIENT AUDIO

5919 Sea Otter Place, Suite 100 • Carlsbad, CA 92010 • 800.472.5555 • Fax 707.283.5901 • proficientaudio.com

©2022 Nortek Security & Control LLC. All rights reserved. Proficient and Sunfire are registered trademarks of Nortek Security & Control LLC.

Rev G, 01/2022

Dolby, Dolby Atmos, and the double-D symbol are registered trademarks of Dolby Laboratories.

DTS, the Symbol, DTS and the Symbol together, DTS:X, and the DTS:X logo are registered trademarks or trademarks of DTS, Inc. in the United States and/or other countries.

DuPont and Kevlar are trademarks or registered trademarks of E.I. du Pont de Nemours and Company.